



* **Versatile Shaft Designs**

Clockwise, Counter Clockwise or Double Shaft to fit any installation need.

* **Automatic Oiling System**

Conde Wick automatic oilers require no adjustment or maintenance. Simply add oil.

* **Check Valve**

Designed to hold tank vacuum even when the pump is not running.

* **Low Profile**

Aids installation and makes operation more convenient.

* **Ideal for smaller tanks**


Why pay more for oversized pumps when the Model 3 is ideal for your application.

* **Powered by as little as 2.5 hp Honda Engine, 1.5 hp electric.**

* **No maintenance Sealed Bearings.**

* **End Thrust Protection to prevent end plate to rotor wear.**

DIMENSIONAL SPECIFICATIONS

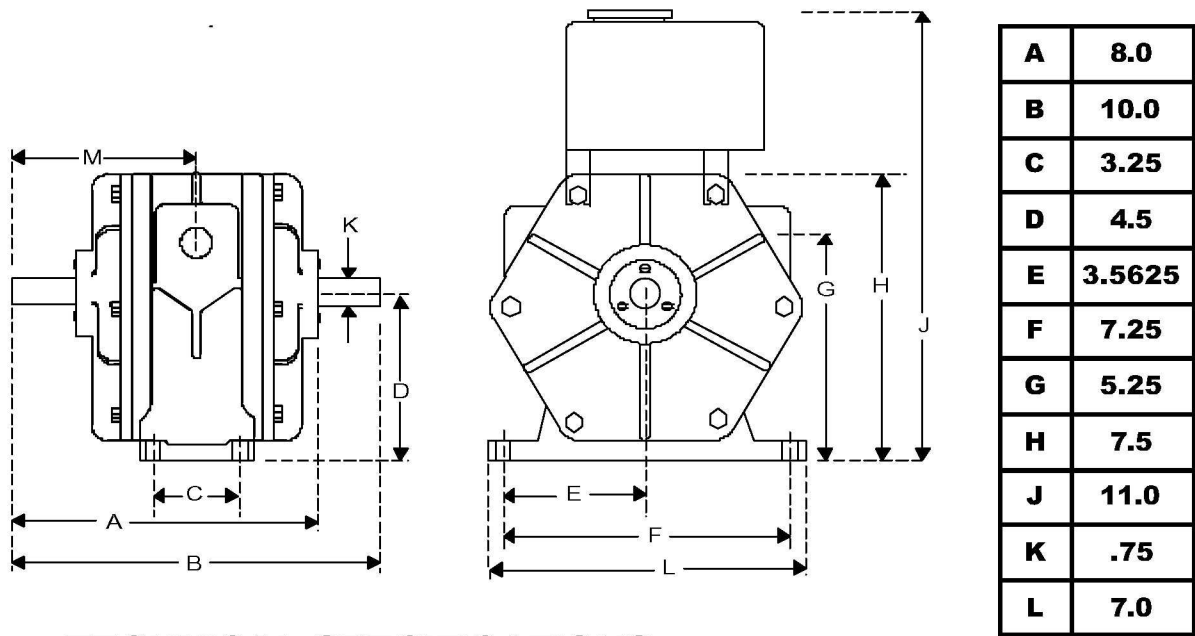

TECHNICAL SPECIFICATIONS

- * MAXIMUM AIR FLOW (Vac.)**
20 Cubic Feet per minute @ free air

*** SPEED RANGE**
1100 RPM TO 1750 RPM

*** LUBRICATION**
Conde Wick Automatic

*** PORT SIZE**
3/4"
- * MAXIMUM VACUUM**
27" Hg (.90 bar) intermittent

*** MAXIMUM PRESSURE**
20 PSI intermittent
(for continuous consult Westmoor, Ltd.)

*** WEIGHT**
38 lbs. (vacuum only model)
43 lbs. (vacuum/pressure model)

*** SHAFT DIAMETER**
3/4"

PERFORMANCE SPECIFICATIONS

Pump R.P.M.	Free Air C.F.M.	S.C.F.M. @ VACUUM				
		5	10	15	18	20
1200	14	11	9	6	5	4
1500	18	14	11	8	6	5
1750	19	16	13	9	7	6

Pump R.P.M.	Free Air C.F.M.	S.C.F.M. @ PRESSURE				
		2	4	8	12	15
1200	16	14	13	10	7	5
1500	19	17	16	15	13	11
1750	20	19	18	17	16	14

Conde' Pumps