


Conde' Pumps

Model 6

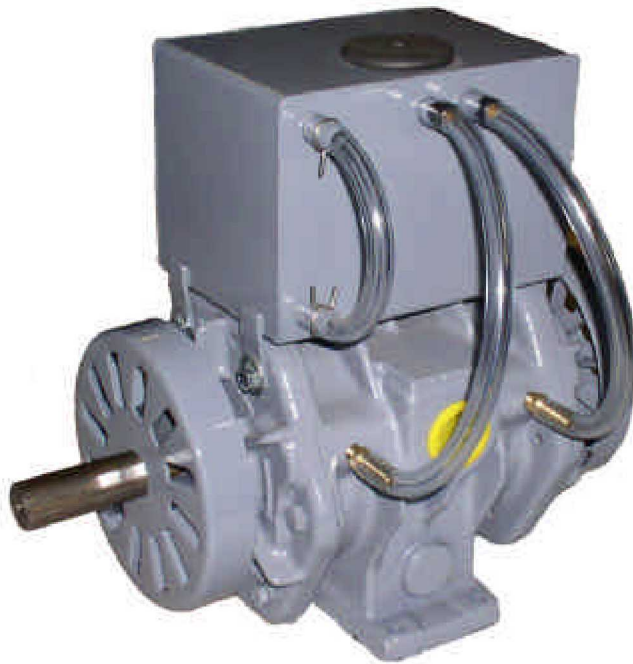

* **Versatile Shaft Designs**

Clockwise, Counter Clockwise or Double Shaft to fit any installation need.

* **Automatic Oiling System**

Conde Wick automatic oilers require no adjustment or maintenance. Simply add oil.

* **Check Valve**

Designed to hold tank vacuum even when the pump is not running.

* **Low Profile**


Aids installation and makes operation more convenient.

* **No maintenance Sealed Bearings.**

* **End Thrust Protection to prevent end plate to rotor wear.**

* **Add Remote Slide Valve for Vacuum/Pressure System.**

DIMENSIONAL SPECIFICATIONS

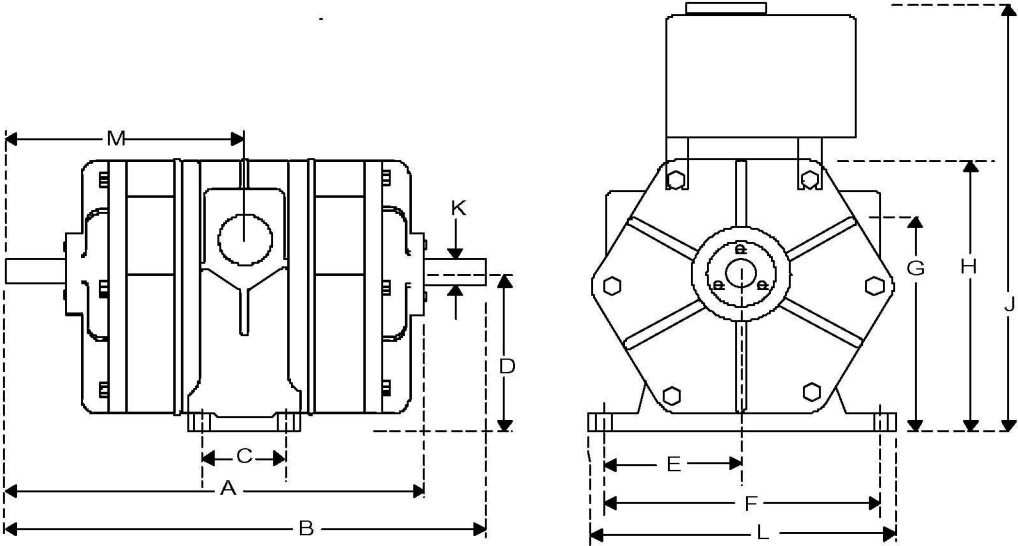

A	11.0
B	16.5
C	3.25
D	4.5
E	3.5625
F	7.25
G	5.25
H	7.5
J	11.0
K	.75
L	7.0
M	8.25

TECHNICAL SPECIFICATIONS

- * MAXIMUM AIR FLOW (Vac.)**
40 Cubic Feet per minute @ free air

*** MAXIMUM VACUUM**
27" Hg (.90 bar) intermittent
- * SPEED RANGE**
1100 RPM TO 1750 RPM

*** MAXIMUM PRESSURE**
20 PSI intermittent
(for continuous consult Westmoor, Ltd.)
- * LUBRICATION**
Conde Wick Automatic

*** WEIGHT**
64 lbs.
- * PORT SIZE**
1"

*** SHAFT DIAMETER**
1"

PERFORMANCE SPECIFICATIONS

Pump R.P.M.	Free Air C.F.M.	S.C.F.M. @ VACUUM				
		5	10	15	18	20
1200	29	22	17	13	9	8
1500	30	28	21	16	11	10
1750	38	131	25	17	13	11

Conde' Pumps